



AN ISO CERTIFIED COMPANY

Medical Devices & Equipments

www.stylushealthcare.com



About us:

STYLUS HEALTHCARE is a manufacturer of infant and maternal care products and assistive devices. STYLUS has the goal of providing cost-effective and innovative neonate-care solutions. Our offered machines are carefully manufactured in tandem with the standards set by medical industry, Using high grade components and innovative technology.

We utilize current technology and techniques while carrying our entire business operations, That drive us to achieve our organization's objective of in an efficient manner.

Mission

As a manufacturer of infant and maternal care products. Our mission continues to be to provide solutions that match the best in the world at very affordable prices.

We proudly say that we have vision to deliver world class products. Make in India with dedication and ethics.

We commit to strengthen our position as a market leader through innovation and continuous improvement.

Our professional team assists you right from analyzing and choosing the right products to successful installation, training and maintenance.

Certifications
















STYWARMINFANT RADIANT WARMER

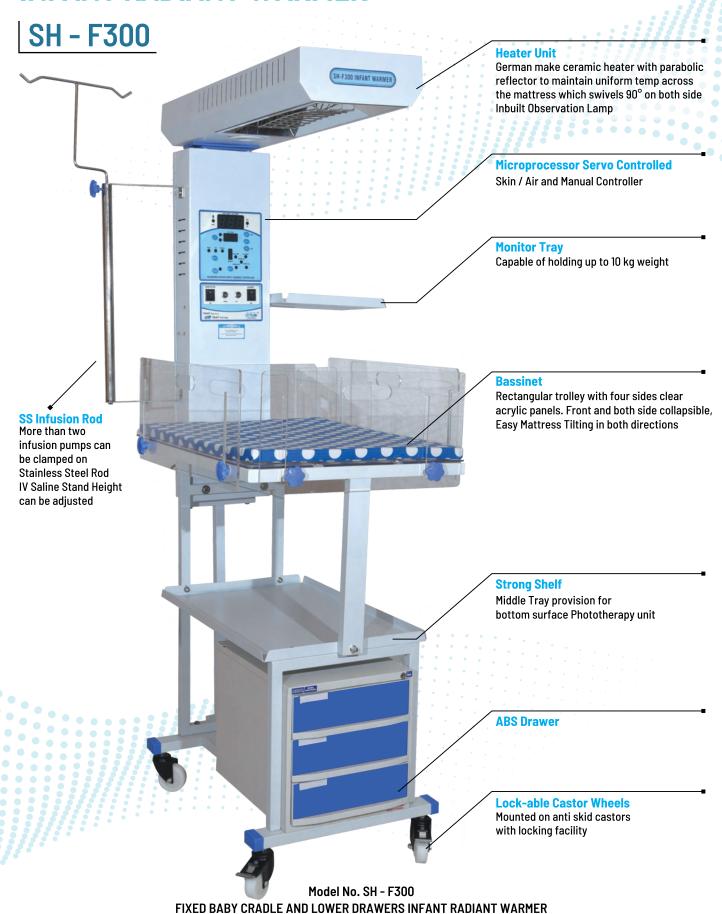





STYWARMINFANT RADIANT WARMER




infusion pumps can be clamped on Stainless Steel Rod

IV Saline Stand Height can be adjusted





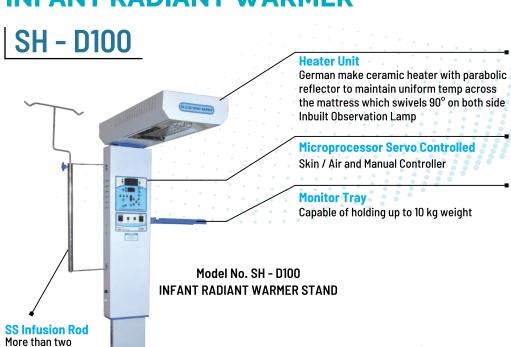

SH - D100
WITH DETACHABLE TROLLEY

Bassinet Rectangular trolley with four sides clear acrylic panels. Front / Back & Both side collapsible, Easy Mattress Tilting in both directions Strong Shelf Middle Tray provision for bottom surface Phototherapy unit

with locking facility

Model No. SH - D100


DETACHABLE BABY CRADLE INFANT RADIANT WARMER

Lock-able Castor WheelsMounted on anti skid castors







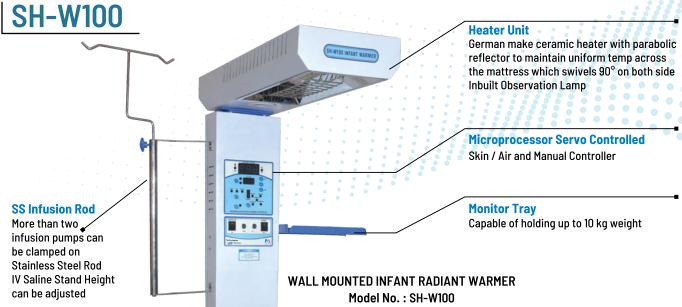

TECHNICAL SPECIFICATIONS

Dimensions

 Width
 : 80 cm

 Depth
 : 85 cm

 Height
 : 178 cm

 Bed Size
 : 54x72 cm

 Monitor Tray Size
 : 31 x26 cm

Features

Mode : Skin / Air and Manual Heater : Ceramic Heater - 650W **Heater Rotation** : ±90° on both side Reflector : Parabolic Reflector Observation Lamp : LED 6W Examination Light **Monitor Tray** : Mild Steel Powder Coated Side Panels : Unbreakable Clear Acrylic Panel Wheels : Strong Castor Wheels with two brake **Mattress** : Waterproof, Flame Resistance & Zipped Cover


Mattress Foam Density : 21 - 25 kg/m³
IV Pole : Adjustable Height
Infusion Pump Stand : Stainless Steel Rod

Temperature Sensor : Thermistor based NTE Sensors with high resolution

Timer : APGAR Timer

Display Baby / Air & Manual LED's for Alarms: High Temp & Low Temp Heater Fail, Probe Fail,

LED's for Alarms: High Temp & Low Tem Heater Fail, Probe Fail, Power Fail Switches : On / Off Switch for warmer & observation light



Electrical Specification

Supply Voltage : 190V - 250V AC High Temperature : If Temp > Set Temp + 1°C

Supply Frequency : 50 - 60 Hz Low Temperature : If Temp > Set Temp + 1°C

Power Consumption : 750 W Probe Failure : Probe Disconnection / Not Working

Alarms

Power Consumption : 750 W Probe Failure : Probe Discont Temperature Display : Celsius / Fahrenheit Power Failure : If Power Fails

Temperature Accuracy : ±0.2°C Heater Failure : If Heater Stops working

Set Temperature Range : 30° - 40°C Heater Output : 0 - 100%

Modes of Operation : Baby, Air & Manual

Manual Mode Timer : 10 Min

Alarms : Audio with 10min Mute & Visual

STYLIGHTLED PHOTOTHERAPY UNIT



LPU 500

STYLUS HEALTHCARE'S LED Phototherapy unit provide intense blue light for effective treatments of neonatal hyperbilirubinemia.



Light Source

Therapeutic high wattage blue LEDs 16 No. having wavelength of 455nm to 465nm. Life of lamps rated to last up to 40000 hours.



Effective Surface Area

Effective surface are is $50 \text{cm} \times 30 \text{cm}$ (At recommended treatment distance of 45 cm) Effective Irradiance is $> 30 \mu \text{M/cm}^2/\text{nm}$



Height Adjustability

Over surface phototherapy unit have height adjustment of up to 50cm.



Dimensions

Lamp unit dimension is 46x31x7.5cm come with heavy duty mobile stand mounted on 4 castor wheel (with Brake 2 Nos)





Observation Lamp

7 Observation white LEDs provide enough light to observe the colour of baby's skin

Advance Touch Panel

STYLUS has developed new & unique featured touch panel for STYLIGHT LED phototheraphy unit with daul timer in hours for lamp time & patient time.

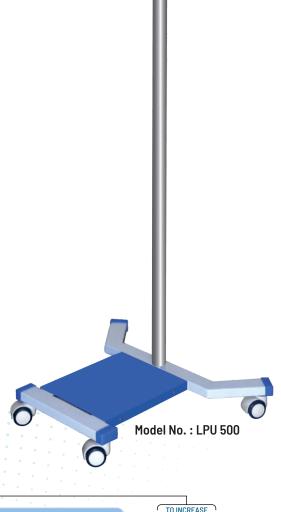

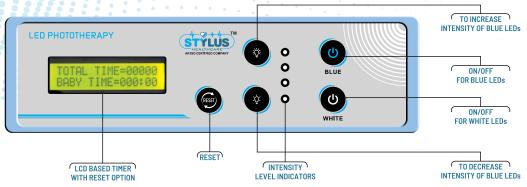



STYLIGHTLED PHOTOTHERAPY UNIT



LPU 300

STYLUS HEALTHCARE'S LED Phototherapy unit provide intense blue light for effective treatments of neonatal hyperbilirubinemia.



Light Source

Therapeutic high wattage blue LEDs 16 No. having wavelength of 455nm to 465nm. Life of lamps rated to last up to 40000 hours.



Effective Surface Area

Effective surface are is $50 \text{cm} \times 30 \text{cm}$ (At recommended treatment distance of 45 cm) Effective Irradiance is $> 30 \mu \text{M/cm}^2 / \text{nm}$



Height Adjustability

Over surface phototherapy unit have height adjustment of up to 50cm.




Dimensions


Lamp unit dimension is 46x31x7.5cm come with heavy duty mobile stand mounted on 4 castor wheel (with Brake 2 Nos)



LCD Based Timer

Dual LCD based timer in hours for lamp time and patient time with reset option and On / Off illuminated switch.

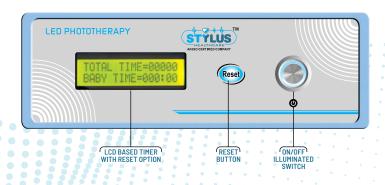

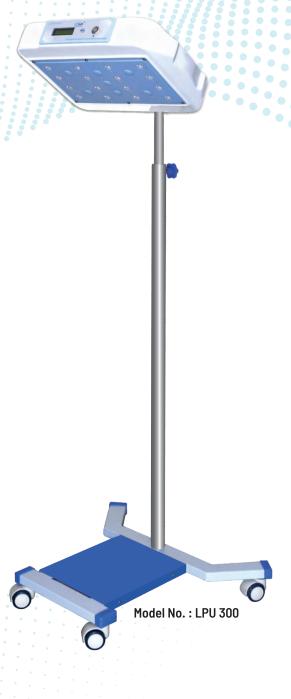



Power Saving

Stylight LPU 500 operating at just 30 Watt & LPU 300 operating at just 20 Watt. It is saving more than 80% power than other normal CFL & tube light phototherapy, they used normally 120W power.

STYLIGHT

DOUBLE SURFACE LED PHOTOTHERAPY UNIT

LPU 500 + LPU 300

Over Surface LED Phototherapy unit has 16 Therapeutic high wattage blue LEDs & 7 White LED for observation, with advanced digital touch panel for operating unit and dual LCD based timer in hours for lamp time and patient time with reset option.

Undesurface LED Phototherapy unit has 16 Therapeutic high wattage Blue LEDs, with dual LCD based timer in hours for lamp time and patient time with reset option and 0n / Off illuminated switch.







LPU 300 + 300

Over Surface LED Phototherapy unit has 16 Therapeutic high wattage blue LEDs, with dual LCD based timer in hours for lamp time and patient time with reset option and 0 n / Off illuminated switch.

Undesurface LED Phototherapy unit has 16 Therapeutic high wattage Blue LEDs, with dual LCD based timer in hours for lamp time and patient time with reset option and 0 n / Off illuminated switch.

NO IR Radiation



STYLIGHT LED Phototherapy is totally cool therapy and does not generate heat. It does not emit light in Infrared range thereby reducing the risk fluid loss.



NO Ultraviolet Radiation

STYLIGHT LED Phototherapy does not emit light in the Ultraviolet (UV) Range thereby reducing the risk of skin and eye damage.

OTHER PRODUCTS



Patient Monitor PM-500





PRODUCT DESCRIPTION

- 12.1" High Resolution Colour Display
- Adult, Pediatric & Neonatal Monitoring
- Full Disclosure to View Beat to Beat ECG Waveform
- Big Font Display to view from Distance
- Oxy CRG Display for Neonatal Monitoring
- Drug Dose Calculation and Titration Table
- Maximum 96-hours Graphic and Tabular Trends of all Parameters
- Three Level Colour Coded Audio-Visual Alarms
- Up-to 2 Hours Working Capacity of Built-in Re-Chargable Battery
- Standard Configuration: ECG, RESP, NIBP, Sp02 & TEMP, PR/HR
- Optional Function: IBP, ETCO2 (Capnography) and Thermal Printer

Syringe Pump

SH-500



PRODUCT FEATURE

- History records
- Unique intelligent self-recognition technology of syringes
- KVO, Bolus and Anti-bolus
- Applicable for 5,10,20,30,50(60) ml syringes
- Compatible for various brands of syringes
- Various infusion modes to meet different clinical requirements
- Various visual and audible alarms
- Large colorful LCD screen
- Real time display, ensure the infusion information to be recorded
- 3 adjustable occlusion levels, dynamically display the pressure
- Double CPU ensuring safe infusion

Infant Bubble CPAP

Stylus Healthcare Bubble CPAP unit is full featured NICU equipment to meet neonatal critical care requirements for New-born baby

those with spontaneous breathing infants requiring respiratory support. It is a complete system providing perfect delivery of FIO2 with inbuilt Air / Oxygen Blender, Bubble generator with pressure manifold, heated breathing circuit and inbuilt medical grade Air compressor.

*Accessories shown in the image may not be part of the standard equipment



Weighing Scale



PRODUCT FEATURE

- Digital Monitoring Device
- Infant Weigh Bed up to 10kg
- Unique Digital Weighing Solution for Infant



TRUST Experience

TRUST Technology

INFANT RADIANT WARMER MODELS

- ◆ Stywarm SH-P100 Infant Warmer
 ◆ Stywarm SH-F100 Infant Warmer
- ◆ Stywarm SH-F300 Infant Warmer
 ◆ Stywarm SH-D100 Infant Warmer

- ◆ Stywarm SH-D300 Infant Warmer
 ◆ Stywarm SH-W100 Infant Warmer

NOTE: MODEL SH-P100, SH-F300 & SH-F100 ARE WITH FIXED TROLLEY, SH-D300 & SH-D100 ARE WITH DETACHABLE TROLLEY AND SH-W100 IS WALL MOUNT UNIT

LED PHOTOTHERAPY MODELS

- Stylight LPU 500 Phototherapy Unit from Above
- Stylight LPU 300 Phototherapy Unit from Above
- Stylight LPU 500 + LPU 300 Double Surface Phototherapy Unit
- Stylight LPU 300 + LPU 300 Double Surface Phototherapy Unit

NOTE: DOUBLE SURFACE LED PHOTOTHERAPY UNIT IS AVAILABLE WITH DETACHABLE TROLLEY



STYLUS HEALTHCARE

😯 : F/F, WZ-9-E, Pole No.36, Block E, Uttam Nagar, New Delhi-110059

📞 : +91-9718792269, 8287531985 🖂 : stylushealthcare@gmail.com

www.stylushealthcare.com



